

# LMX-0800 Series

8-Port Industrial Managed Ethernet Switch, with 8\*10/100Tx Ports



## Features


- ▶ Supports 8\*10/100Tx RJ45 Ports
- ▶ Network Redundancy: STP/RSTP/MSTP, and G.8032 ERPS (Recovery Time <50ms)
- ▶ Supports IPv4/IPv6, and DHCP Option 66/67/82
- ▶ Supports Modbus/TCP Protocol for Device Management and Monitoring
- ▶ Configuration: Web Console, Telnet, CLI Command
- ▶ IGMP v1/v2 for Multicast Traffic Filtering
- ▶ System Warning Setting for Automatic Warning through E-mail
- ▶ QoS (IEEE802.1p/1Q), CoS/ToS to Increase Determinism
- ▶ IEEE802.1Q VLAN for Easy Network Planning
- ▶ Enhanced Network Security with IEEE802.1X, SNMP v1/v2c/v3, HTTPS, and SSH/SSL
- ▶ Auto Warning by Exception through E-mail, Relay Output
- ▶ Operating Temperature Range: STD: -10° to 70°C, EOT: -40° to 75°C
- ▶ 5-Year Warranty

## INTRODUCTION

Antaira Technologies' **LMX-0800 series** is an 8-port industrial managed Ethernet switch that is embedded with 8\*10/100Tx Ethernet ports. The LMX-0800 series is a fully manageable Layer 2 Ethernet switch that is pre-loaded with a user-friendly web management console design. It supports the ring network redundancy function using the market's open standard ITU-T G.8032 ERPS (Ethernet Ring Protection Switch) protocol that has a <50ms network recovery time. The advanced network filtering and security functions, such as, IGMP, VLAN, QoS, SNMP, port lock, RMON, Modbus TCP, and 802.1X/HTTPS/SSH/SSL increase determinism and improve network management for remote SCADA systems or control networks.

The LMX-0800 series is IP30 rated and DIN-rail mountable. There are also two wide operating temperature models for either a standard temperature range (STD: -10°C to 70°C) or an extended temperature range (EOT: -40°C to 75°C). It also provides high EFT and ESD protection for industrial networking applications, such as, power/utility, water wastewater, oil/gas/mining, factory automation, security surveillance within transportation, ITS and any other outdoor or harsh environment.

## DIMENSIONS

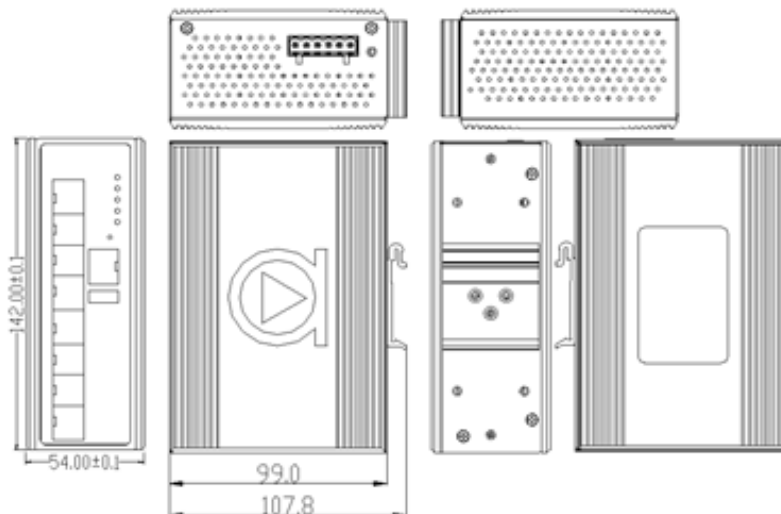

## SPECIFICATIONS

<b>Technology</b>		IEEE 802.3 10Tx Ethernet IEEE 802.3u 100Tx Fast Ethernet IEEE 802.3x Flow Control for Full Duplex IEEE 802.3ad for Port Trunk with LACP IEEE 802.1d STP (Spanning Tree Protocol) IEEE 802.1w RSTP (Rapid Spanning Tree Protocol)	<b>Protection</b>	
<b>Standards</b>		IEEE 802.1s MSTP (Multiple Spanning Tree Protocol) ITU-T G.8032/Y.1344 ERPS (Ethernet Ring Protection Switch) Protocol IEEE 802.1Q for VLAN Tagging IEEE 802.1x for Network Authentication IEEE 802.1p QoS/CoS Protocol for Traffic Prioritization	<b>Overload Current Protection</b>	Present
<b>Switch Properties</b>			<b>Power Reverse Polarity</b>	Present
<b>Protocol</b>	IGMPv1/v2, SNMPv1/v2c/v3, TFTP, SNMP, SMTP, RMON, HTTP, HTTPS, Telnet, Syslog, DHCP Option 66/67/82, SSH/SSL, Modbus/TCP, LLDP, IPv4/IPv6, NAT, DHCP per port, SMTP, Quick ERPS, TLS		<b>CPU Watchdog</b>	Present
<b>Configuration</b>	Web Console, Telnet, CLI		<b>Network Cable</b>	
<b>Processing Type</b>	Store and Forward		10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable; 100Base-TX: 2-pair UTP/STP Cat. 5 cable. EIA/TIA-568 100-ohm (100m) 1000BaseTX: UTP/STP Cat.5/5E cable; EIA/TIA-568 100-ohm (100m)	
<b>Flow Control</b>	IEEE 802.3x for full duplex mode, back pressure for half duplex mode		<b>Mechanical Characteristics</b>	
<b>Transfer Rate</b>	14,880pps for 10Base-T Ethernet 148,800pps for 100Base-T Fast Ethernet		<b>LED Indicators</b>	Per Unit: Power 1 & 2 (Green), Fault (Green/Red)
<b>Packet Buffer</b>	4 Mbits		<b>Housing</b>	Metal, IP30 rated
<b>Jumbo Frame</b>	-		<b>Dimension</b>	54 x 142 x 99 mm
<b>MAC Table Size</b>	8K		<b>Weight</b>	Unit: 2.4 lbs Shipping: 2.9 lbs
<b>VLAN Group</b>	0 ~ 4094		<b>Mounting</b>	DIN-Rail; Wall-mount (optional)
<b>IGMP Group</b>	Up to 256 Group		<b>Power Requirement</b>	
<b>Port Interface</b>			<b>Input Voltage</b>	12~48VDC Redundant Input
<b>Ethernet Port</b>	8*10/100BaseTx auto negotiation speed, Full/Half duplex mode, and auto MDI connection		<b>Power Connection</b>	1 removable 6-contact terminal block
<b>RS232 Serial Console</b>	1*RS232 in RJ45 connector with console cable, 115.2Kbps, 8,N,1		<b>Power Consumption</b>	15 Watts
<b>Configuration Backup</b>	1*USB 2.0		<b>Environmental Limits</b>	
			<b>Operating Temperature</b>	STD: -10° to 70°C EOT: -40° to 75°C
			<b>Storage Temperature</b>	-40°~85°C
			<b>Ambient Relative Humidity</b>	5 to 95%, (non-condensing)
			<b>Regulatory Approvals</b>	
			<b>EMI</b>	FCC Class A
			<b>EMS</b>	EN61000-4-2,3,4,5,6,8 EN61000-6-2,4
			<b>Free Fall Shock</b>	IEC60068-2-32 IEC60068-2-27
			<b>Vibration</b>	IEC60068-2-6
			<b>Green</b>	RoHS Compliant
			<b>Certifications</b>	FCC, CE, UL 61010-1, UL 61010-2-201
			<b>Warranty</b>	5 Years

## ORDERING INFO

<b>LMX-0800</b>	8-Port Industrial Managed Ethernet Switch, with 8*10/100Tx Ports
<b>LMX-0800-T</b>	8-Port Industrial Managed Ethernet Switch, with 8*10/100Tx Ports; EOT: -40° to 75°C

### Optional Accessories

<b>MDR-60-24</b>	60W Industrial Din Rail Power Supply, 24VDC
<b>MDR-60-48</b>	60W Industrial Din Rail Power Supply, 48VDC
<b>DR-75-48</b>	75W Industrial Din Rail Power Supply, 48VDC
<b>DIN-RACK-2U</b>	DIN-Rail to 19" Rack Mount Adapter for all DIN-Rail Mountable Products, 2U Height