

LMX-0804G-SFP Series

Features

8-Port Industrial Gigabit Managed Ethernet Switches, w/4*10/100/1000Tx, 4*100/1000Fx; 12~48VDC Power Input




- ▶ Supports 4*10/100/1000Tx, and 4*100/1000Fx Dual Rate SFP Fiber Slots
- ▶ Network Redundancy: STP/RSTP/MSTP, and G.8032 ERPS (Recovery Time <50ms)
- ▶ Supports IPv4/IPv6, and DHCP Option 66/67/82
- ▶ Supports Modbus/TCP Protocol for Device Management and Monitoring
- ▶ Configuration: Web Console, Telnet, CLI Command
- ▶ IGMP v1/v2 for Multicast Traffic Filtering
- ▶ QoS (IEEE802.1p/1Q), CoS/ToS to Increase Determinism
- ▶ IEEE802.1Q VLAN for Easy Network Planning
- ▶ Enhanced Network Security with IEEE802.1X, SNMP v1/v2c/v3, HTTPS, and SSH/SSL
- ▶ Auto Warning by Exception through E-mail, Relay Output
- ▶ Support RMON Function for Efficient Network Monitoring
- ▶ Support Port Mirroring for Online Diagnostic
- ▶ Operating Temp -STD: -10~70°C, EOT: -40~75°C
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' LMX-0804G-SFP series is an 8-port industrial managed Ethernet switch that is embedded with 4*10/100/1000Tx Ethernet ports, and 4*100/1000Fx SFP fiber ports that support either Single or Multi-Mode modules. The LMX-0804G-SFP series is a fully manageable Layer 2 Ethernet switch that is pre-loaded with a user-friendly web management console design. It supports the ring network redundancy function using the market's open standard ITU-T G.8032 ERPS (Ethernet Ring Protection Switch) protocol that has a <50ms network recovery time. The advanced network filtering and security functions, such as, IGMP, VLAN, QoS, SNMP, port lock, RMON, Modbus TCP, and 802.1X/ HTTPS/ SSH/ SSL increase determinism and improve network management for remote SCADA systems or control networks.

The LMX-0804G-SFP series is IP30 rated and DIN-rail mountable. There are also two wide operating temperature models for either a standard temperature range (STD: -10°C to 70°C) or an extended temperature range (EOT: -40°C to 75°C). It also provides high EFT and ESD protection for industrial networking applications, such as, power/utility, water wastewater, oil/gas/mining, factory automation, security surveillance within transportation, ITS and any other outdoor or harsh environment.

DIMENSIONS

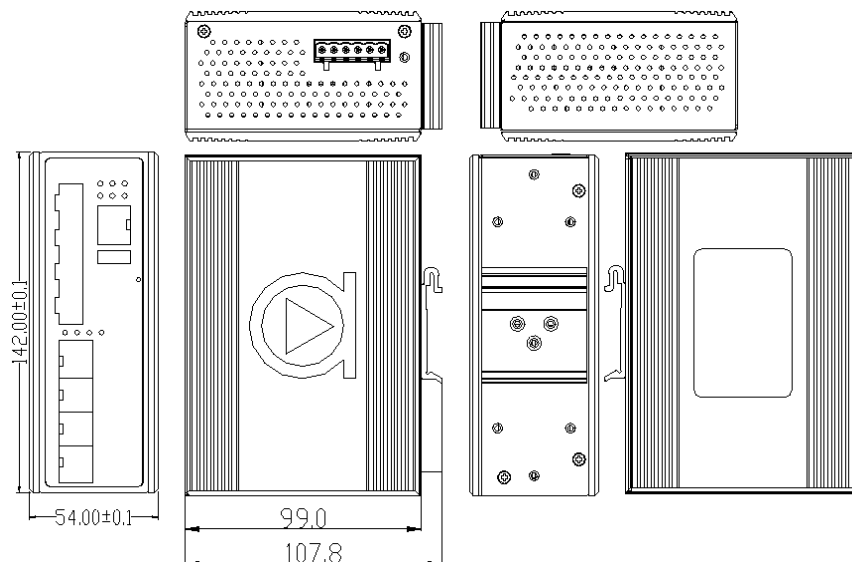

SPECIFICATIONS

Technology

IEEE 802.3 10Tx Ethernet
 IEEE 802.3u 100Tx Fast Ethernet
 IEEE 802.3ab 1000Tx Gigabit Ethernet
 IEEE 802.3z Gigabit Fiber
 IEEE 802.3x Flow Control for Full Duplex
 IEEE 802.3ad for Port Trunk with LACP
 IEEE 802.1d STP (Spanning Tree Protocol)
 IEEE 802.1w RSTP (Rapid Spanning Tree Protocol)
 IEEE 802.1s MSTP (Multiple Spanning Tree Protocol)
 ITU-T G.8032/Y.1344 ERPS (Ethernet Ring Protection Switch) Protocol
 IEEE 802.1Q for VLAN Tagging
 IEEE 802.1x for Network Authentication
 IEEE 802.1p QoS/CoS Protocol for Traffic Prioritization

Standards

Switch Architecture Back-Plane (Switching Fabric): 16.0Gbps

Protocol IGMPv1/v2, SNMPv1/v2c/v3, TFTP, SNMP, SMTP, RMON, HTTP, HTTPS, Telnet, Syslog, DHCP Option 66/67/82, SSH/SSL, Modbus/TCP, LLDP, IPv4/IPv6, NAT, DHCP per port, SMTP, Quick ERPS, TLS

Data Process Store and Forward

Transfer Rate 14,880pps for 10Base-T Ethernet
 148,800pps for 100Base-T Fast Ethernet
 1,488,000pps for Gigabit Ethernet

Packet Buffer 4 Mbits

MAC Table 8K

Jumbo Frame 9.6K

Flow Control IEEE 802.3x for full duplex mode, back pressure for half duplex mode

VLAN Group 0 ~ 4094

IGMP Group Up to 256 Groups

Port Interface

Ethernet RJ45 Port 4*10/100/1000Tx auto negotiation speed, Full/Half duplex mode, and auto MDI connection

Fiber Port 4*100/1000 Dual Rate SFP Slots

Wavelength Dependent on Fiber type and Distance

RS232 Serial Console 1*RS232 in RJ45 connector with console cable, 115.2bps, 8,N,1

Configuration Backup 1*USB 2.0

Protection

Overload Current Present

Power Reverse Polarity Present (the unit will not be on, if power reverse)

Network Cable 10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable;
 100Base-TX: 2-pair UTP/STP Cat. 5 cable. EIA/TIA-568 100-ohm (100m)
 1000Base-TX: UTP/STP Cat.5/5E cable; EIA/TIA-568 100-ohm (100m)

Mechanical Characteristics

LED Indicator Per Unit: Power 1 & 2 (Green), Fault (Red)

Housing Metal IP30 rated

Dimensions 54 x 142 x 99 mm

Weight Unit: 2.4 lbs
 Shipping: 2.9 lbs

Mounting DIN-Rail; Wall-mount (optional)

Power Requirement

Input Voltage 12~48VDC Redundant Input

Power Connection 1 removable 6-contact terminal block

Power Consumption 15 Watts

Environmental Limits

Operating Temperature STD: -10° to 70°C

EOT: -40° to 75°C

Storage Temperature -40°C ~ 85°C

Ambient Relative Humidity 5 to 95%, (non-condensing)

Regulatory Approvals

EMI FCC Class A

EMS EN6100-4-2,3,4,5,6,8
 EN6100-6-2,4

Free Fall IEC60068-2-32

Shock IEC60068-2-27

Vibration IEC60068-2-6

Green RoHS Compliant

Certifications FCC, CE,
 UL 61010-1, UL 61010-2-201

Warranty 5 Years

ORDERING INFO

LMX-0804G-SFP	8-Port Industrial Managed Ethernet Switch with 4*10/100/1000Tx + 4*100/1000Fx SFP Slots, 12~48VDC Power Input
LMX-0804G-SFP-T	8-Port Industrial Managed Ethernet Switch with 4*10/100/1000Tx + 4*100/1000Fx SFP Slots, 12~48VDC Power Input; EOT: -40° to 75°C

Optional Accessories

MDR-60-24	60W Industrial Din Rail Power Supply (24VDC)
MDR-60-48	60W Industrial Din Rail Power Supply (48VDC)
SFP-M-T	1 Gigabit Fiber SFP Transceiver, Multi-Mode 550M / LC / 850nm, -40°C~85°C
SFP-S10-T	1 Gigabit Fiber SFP Transceiver, Single Mode 10KM / LC / 1310nm, -40°C~85°C
DIN-RACK-2U	Din-Rail to 19" Rack Mount Adapter for all Din-Rail Mountable Products, 2U Height