


APX-120N5

Outdoor Wireless Preconfigured Bridging Pair

A) Hardware Setup

1. APX-120N5-1: Preconfigured as AP WDS that the user will connect to the network
2. APX-120N5-2: Preconfigured as a Client WDS that will be connected to the end devices
3. Connect the APX-120N5-1 and APX-120N5-2 units to PoE injectors.
4. Once power is applied to the PoE injectors, the units will automatically power up and create a wireless link between the two units.

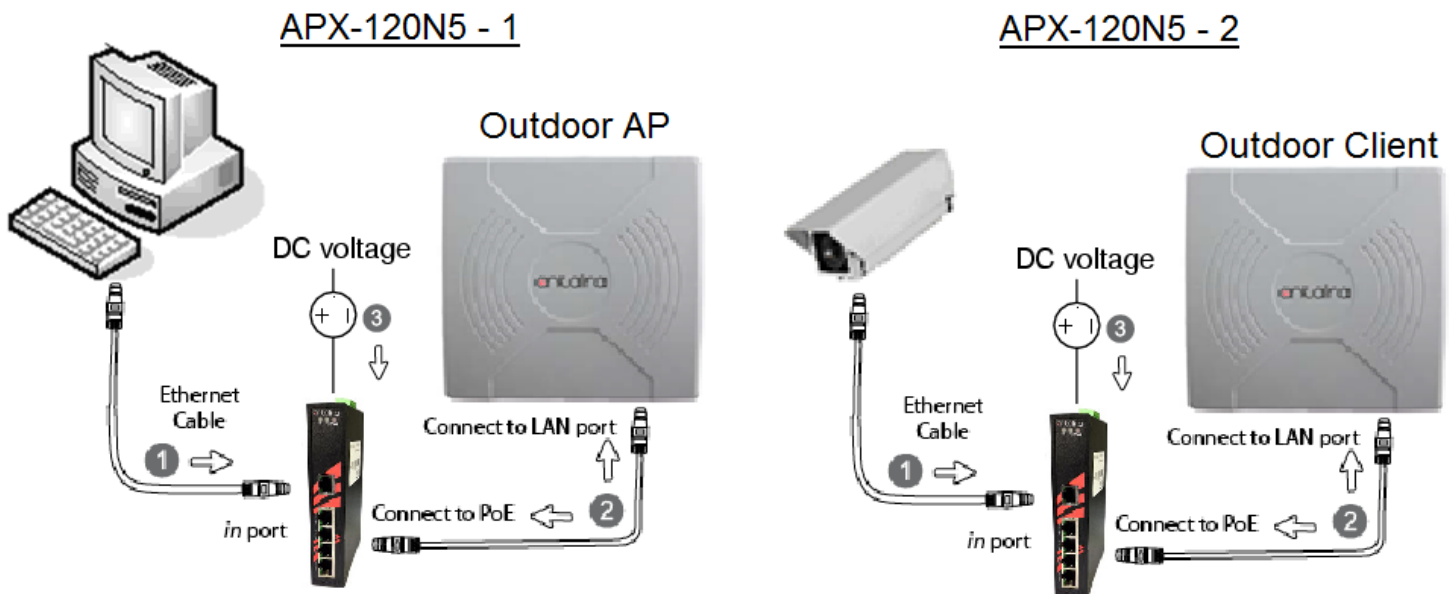

Unit Notes:

Both units have built in 19dBi dual polarization antennas.

For better signal strength the user can log into either of the unit web console to utilize the Antenna alignment software.

Recovery:

- If a wireless connection cannot be reestablished for whatever reason. The user can reset each of the units to the factory default settings through the web console
- This will default the units to the original 192.168.168.1 and 192.168.168.2 IP addresses and re-establish the link between the two units

** For Further setup info please refer to the user manual

** For immediate assistance please call our technical support team