

LMX-0602-XX-V2 Series

6-Port Industrial Light Layer 3 Managed Ethernet Switch, with 4*10/100Tx and 2*100Fx Multi-Mode/Single Mode, 12~48VDC Power Input; Version 2 Hardware



Features


- ▶ Supports 4*10/100Tx RJ45 Ports and 2*100Fx Fiber Ports
- ▶ Supports Network Redundancy: STP/RSTP/MSTP, and G.8032 ERPS (Recovery Time <50ms)
- ▶ Supports IPv4/IPv6, and DHCP Option 66/67/82
- ▶ Supports Modbus/TCP Protocol for Device Management and Monitoring
- ▶ Configuration: Web Console, Telnet, CLI Command
- ▶ Supports IGMP v1/v2/v3, up to 1024 Groups
- ▶ QoS (IEEE802.1p/1Q), CoS/ToS to Increase Determinism
- ▶ Redundant Power Input Design: 12~48VDC
- ▶ Reverse Polarity Protection
- ▶ IP30 Protection
- ▶ DIN-Rail or Wall Mountable
- ▶ Operating Temperature Range
 - STD: -10°C to 70°C, EOT: -40°C to 75°C
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' LMX-0602-XX-V2 series is a 6-port industrial managed Ethernet switch embedded with 4*10/100Tx Ethernet ports and 2*100Fx fiber connections. The LMX-0602-XX-V2 is a fully manageable light layer 3 Ethernet switch that is pre-loaded with a user-friendly web management console design. It supports the ring network redundancy function using the market's open standard ITU-T G.8032 Ethernet Ring Protection Switch (ERPS) protocol that has a <50ms network recovery time. The advanced network filtering and security functions, such as IGMP, VLAN, QoS, SNMP, RMON, Modbus TCP, and 802.1X/HTTPS/SSH/SSL increase determinism and improve network management for remote SCADA systems or control networks.

The LMX-0602-XX-V2 series is IP30 rated and DIN-rail mountable. There are also two wide operating temperature models for either a standard temperature range (STD: -10°C to 70°C) or an extended temperature range (EOT: -40°C to 75°C). It also provides high EFT and ESD protection for industrial networking applications, such as power/utility, water wastewater, oil/gas/mining, factory automation, security surveillance, ITS and any other outdoor or harsh environment.

DIMENSIONS

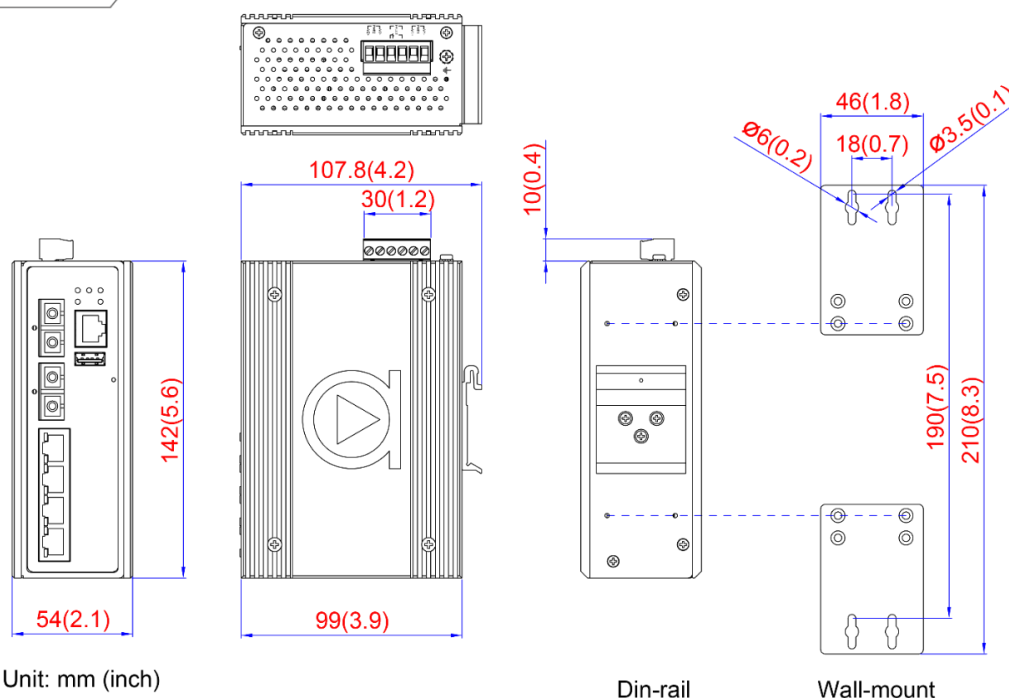

SPECIFICATIONS

Technology	Port/MAC/Protocol/IP Subnet-based VLAN, VLAN trunking, GARP/GVRP, Loop Guard, Link Aggregation static/LACP, BPDU guard, Error disable recovery, IGMPv2/v3 snooping, MLD snooping, IGMP filtering, IPMC throttling / filtering leave proxy, DHCP snooping, ARP, MEP, G.8032 v1/v2, NAT, DHCP per port, SMTP, Quick ERPS, TLS
L2 Switching	
L3 Switching	DHCP option82, static routes
QoS	802.1p Queueing, Input priority mapping, Storm control for Unicast/Multicast/Broadcast, Port/Queue/ACL policer, Port egress shaper, Queue egress shaper, DiffServ (DSCP), Tag remarking, Scheduler mode
Power Saving	ActiPHY, PerfectReach, IEEE 802.3az EEE power management
Network Redundancy Configuration	STP/RSTP/MSTP, port trunk with LACP, ERPS v1/v2 (<50ms)
System / Diagnostics	Http, Https, Telnet, SSH, CLI, TFTP, SNMP v3
Switch Properties	Dual Image Protection, PING, PING6
Switch Architecture	Back-Plane (Switching Fabric): 1.2Gbps IPv4/IPv6, SNMP v1/v2c/v3, LLDP, LLDP-MED, HTTP, HTTPS, SSHv2 telnet, DHCP client, DHCPv6 client, DHCP server, Port Mirror, DNS client/proxy, IP based Access Filter, ICMPv6, syslog, Time Zone / Daylight Saving, NTP client, RMON, sFlow, Loop detection, Console Port, Power Lost Warning, Relay Trigger
Protocols	
Priority Queues	8
Processing Type	Store and Forward
Flow Control	IEEE 802.3x flow control, back pressure flow control
Transfer Rate	14,880pps for Ethernet Port 148,800pps for Fast Ethernet Port
Memory Buffer	4Mbits
Jumbo Frame	9.6Kbytes
MAC Table Size	8K
VLAN Group	4095
IGMP Group	1024
Port Interface	
Ethernet Port	4*10/100Base-TX, auto negotiation speed, Full/Half duplex mode, and auto MDI/MDI-X connection
Fiber Port	2*100Base-FX SC/ST type connector

RS232 Serial Console	1*RS232 in RJ45
LED Indicators	System: Power 1, Power 2, Master, Ring, Fault Ethernet Ports: Speed/Link/Active Fixed Fiber: Link/Active
Protection	
Network Cable	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm (100m)
Mechanical Characteristics	
Housing	Metal, IP30 protection
Dimensions	54 x 142 x 99 mm (W x H x D)
Weight	Unit: 1.9 lbs Shipping: 2.7 lbs
Mounting	DIN-Rail mounting, Wall mounting
Power Requirement	
Input Voltage	12~48VDC Redundant Input
Power Connection	1 removable 6-contact terminal block
Relay Contact	24VDC, 1A resistive
Overload Current Protection	Present
Reverse Polarity Protection	Present
System Power Consumption	7.5W
Environmental Limits	
Operating Temperature	STD: -10°C to 70°C EOT: -40°C to 75°C
Storage Temperature	-40°C to 85°C
Ambient Relative Humidity	5% to 95%, (non-condensing)
Regulatory Approvals	
EMI	FCC Part 15 Subpart B Class A, CE EN55032/EN61000-6-4 Class A
EMS	CE EN55035/EN61000-6-2, IEC61000-4-2,3,4,5,6,8
Free Fall	IEC60068-2-32
Shock	IEC60068-2-27
Vibration	IEC60068-2-6
Green	RoHS Compliant
Certifications	FCC, CE, UL 61010-1, 61010-2-201
Warranty	5 Years

ORDERING INFO

LMX-0602-M-V2	6-Port Industrial Light Layer 3 Managed Ethernet Switch, with 4*10/100Tx and 2*100Fx Multi-Mode 2Km, 12~48VDC Power Input; Version 2 Hardware
LMX-0602-M-T-V2	6-Port Industrial Light Layer 3 Managed Ethernet Switch, with 4*10/100Tx and 2*100Fx Multi-Mode 2Km, 12~48VDC Power Input; Version 2 Hardware; EOT: -40°C to 75°C
LMX-0602-S3-V2	6-Port Industrial Light Layer 3 Managed Ethernet Switch, with 4*10/100Tx and 2*100Fx Single-Mode 30Km, 12~48VDC Power Input; Version 2 Hardware
LMX-0602-S3-T-V2	6-Port Industrial Light Layer 3 Managed Ethernet Switch, with 4*10/100Tx and 2*100Fx Single-Mode 30Km, 12~48VDC Power Input; Version 2 Hardware; EOT: -40°C to 75°C
LMX-0602-ST-M-V2	6-Port Industrial Light Layer 3 Managed Ethernet Switch, with 4*10/100Tx and 2*100Fx Multi-Mode 2Km, ST Connector, 12~48VDC Power Input; Version 2 Hardware
LMX-0602-ST-M-T-V2	6-Port Industrial Light Layer 3 Managed Ethernet Switch, with 4*10/100Tx and 2*100Fx Multi-Mode 2Km, ST Connector, 12~48VDC Power Input; Version 2 Hardware; EOT: -40°C to 75°C
LMX-0602-ST-S3-V2	6-Port Industrial Light Layer 3 Managed Ethernet Switch, with 4*10/100Tx and 2*100Fx Single-Mode 30Km, ST Connector, 12~48VDC Power Input; Version 2 Hardware
LMX-0602-ST-S3-T-V2	6-Port Industrial Light Layer 3 Managed Ethernet Switch, with 4*10/100Tx and 2*100Fx Single-Mode 30Km, ST Connector, 12~48VDC Power Input; Version 2 Hardware; EOT: -40°C to 75°C